


KLEMMBRETTER


Versenkten Befestigungs -Langlöchern, kompl.m. Muttern, Beilagsch. u. Verbindungsstegen.

Type	Maße (mm)	Lochabstand (mm)	Bolzen	€/Stk.
AK 205	40x25x10	11 bis 19	M3	4,10
AK 216	43x27x12	12 bis 20	M4	4,10
AK 225	56x36x13	16 bis 24	M5	4,90
AK 230	70x45x15	20 bis 32	M6	7,90
AK 250	95x60x21	30 bis 54	M8	14,10
AK 255	120x75x20	30 bis 60	M10	26,30

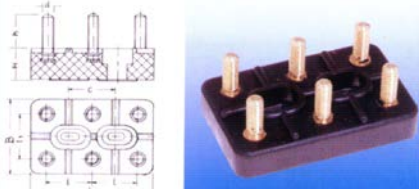


Mit 2 runden bzw. quadr. Befestigungslöchern

SNO	40x25x9	15	M3	3,50
SN1	50x32x10,5	18	M4	4,00
SN10	44x28x9,5	15	M4	3,90
SN2	56x36x12	20	M5	5,70
SN8	64x40x12,5	23	M5	6,10
SN3	71x48x13,5	25	M6	7,40
SN4	78x48x14,5	28	M6	8,50
SN5	82x52x16	30	M6	7,70
SN6	95x60x16	32	M8	13,10
SN7/708	114x70x19	35	M8	14,60
SN9	120x75x22	45	M10	27,70
SN1224/M12	160x100x30	60	M12	51,00
SN1224/M16	160x100x30	60	M16	132,00

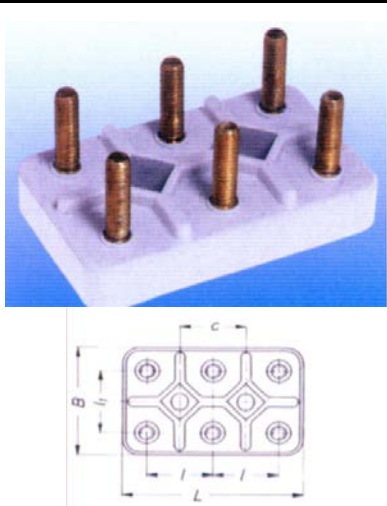

Mit 4 versenkten Befestigungslöchern und 9 Bolzen

AK 500	44x44x11	15	M4	6,30
AK 510	56x56x12	20	M5	8,90
AK 520	70x70x15	25	M6	10,80
AK 530/S96	80x80x16	30	M8	26,50
AK 540	108x108x25	40	M10	59,20
AK 550	145 x 145		M12	a.A.



Keramikklembretter

AK 311	54x34	20	M4	11,40
AK 310	50x35	21	M5	12,40
AK 313	78x48	28	M6	15,50

EX - KLEMMBRETTER

EX 1 = AK 610	54x34x14,5	20	S7x0,8	19,50
EX 0 = AK 612	37x60	23	S7x0,8	22,80
EX 2 = AK 615	64x40x19,5	23	S8x1	23,60
EX 3 = AK 620	78x48x18	28	S10x1	32,60
EX 4 = AK 625	96x60x21,5	35	S14x1,25	47,00
EX 5 = AK 630	120x75	45	S18x1,5	99,40

